


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

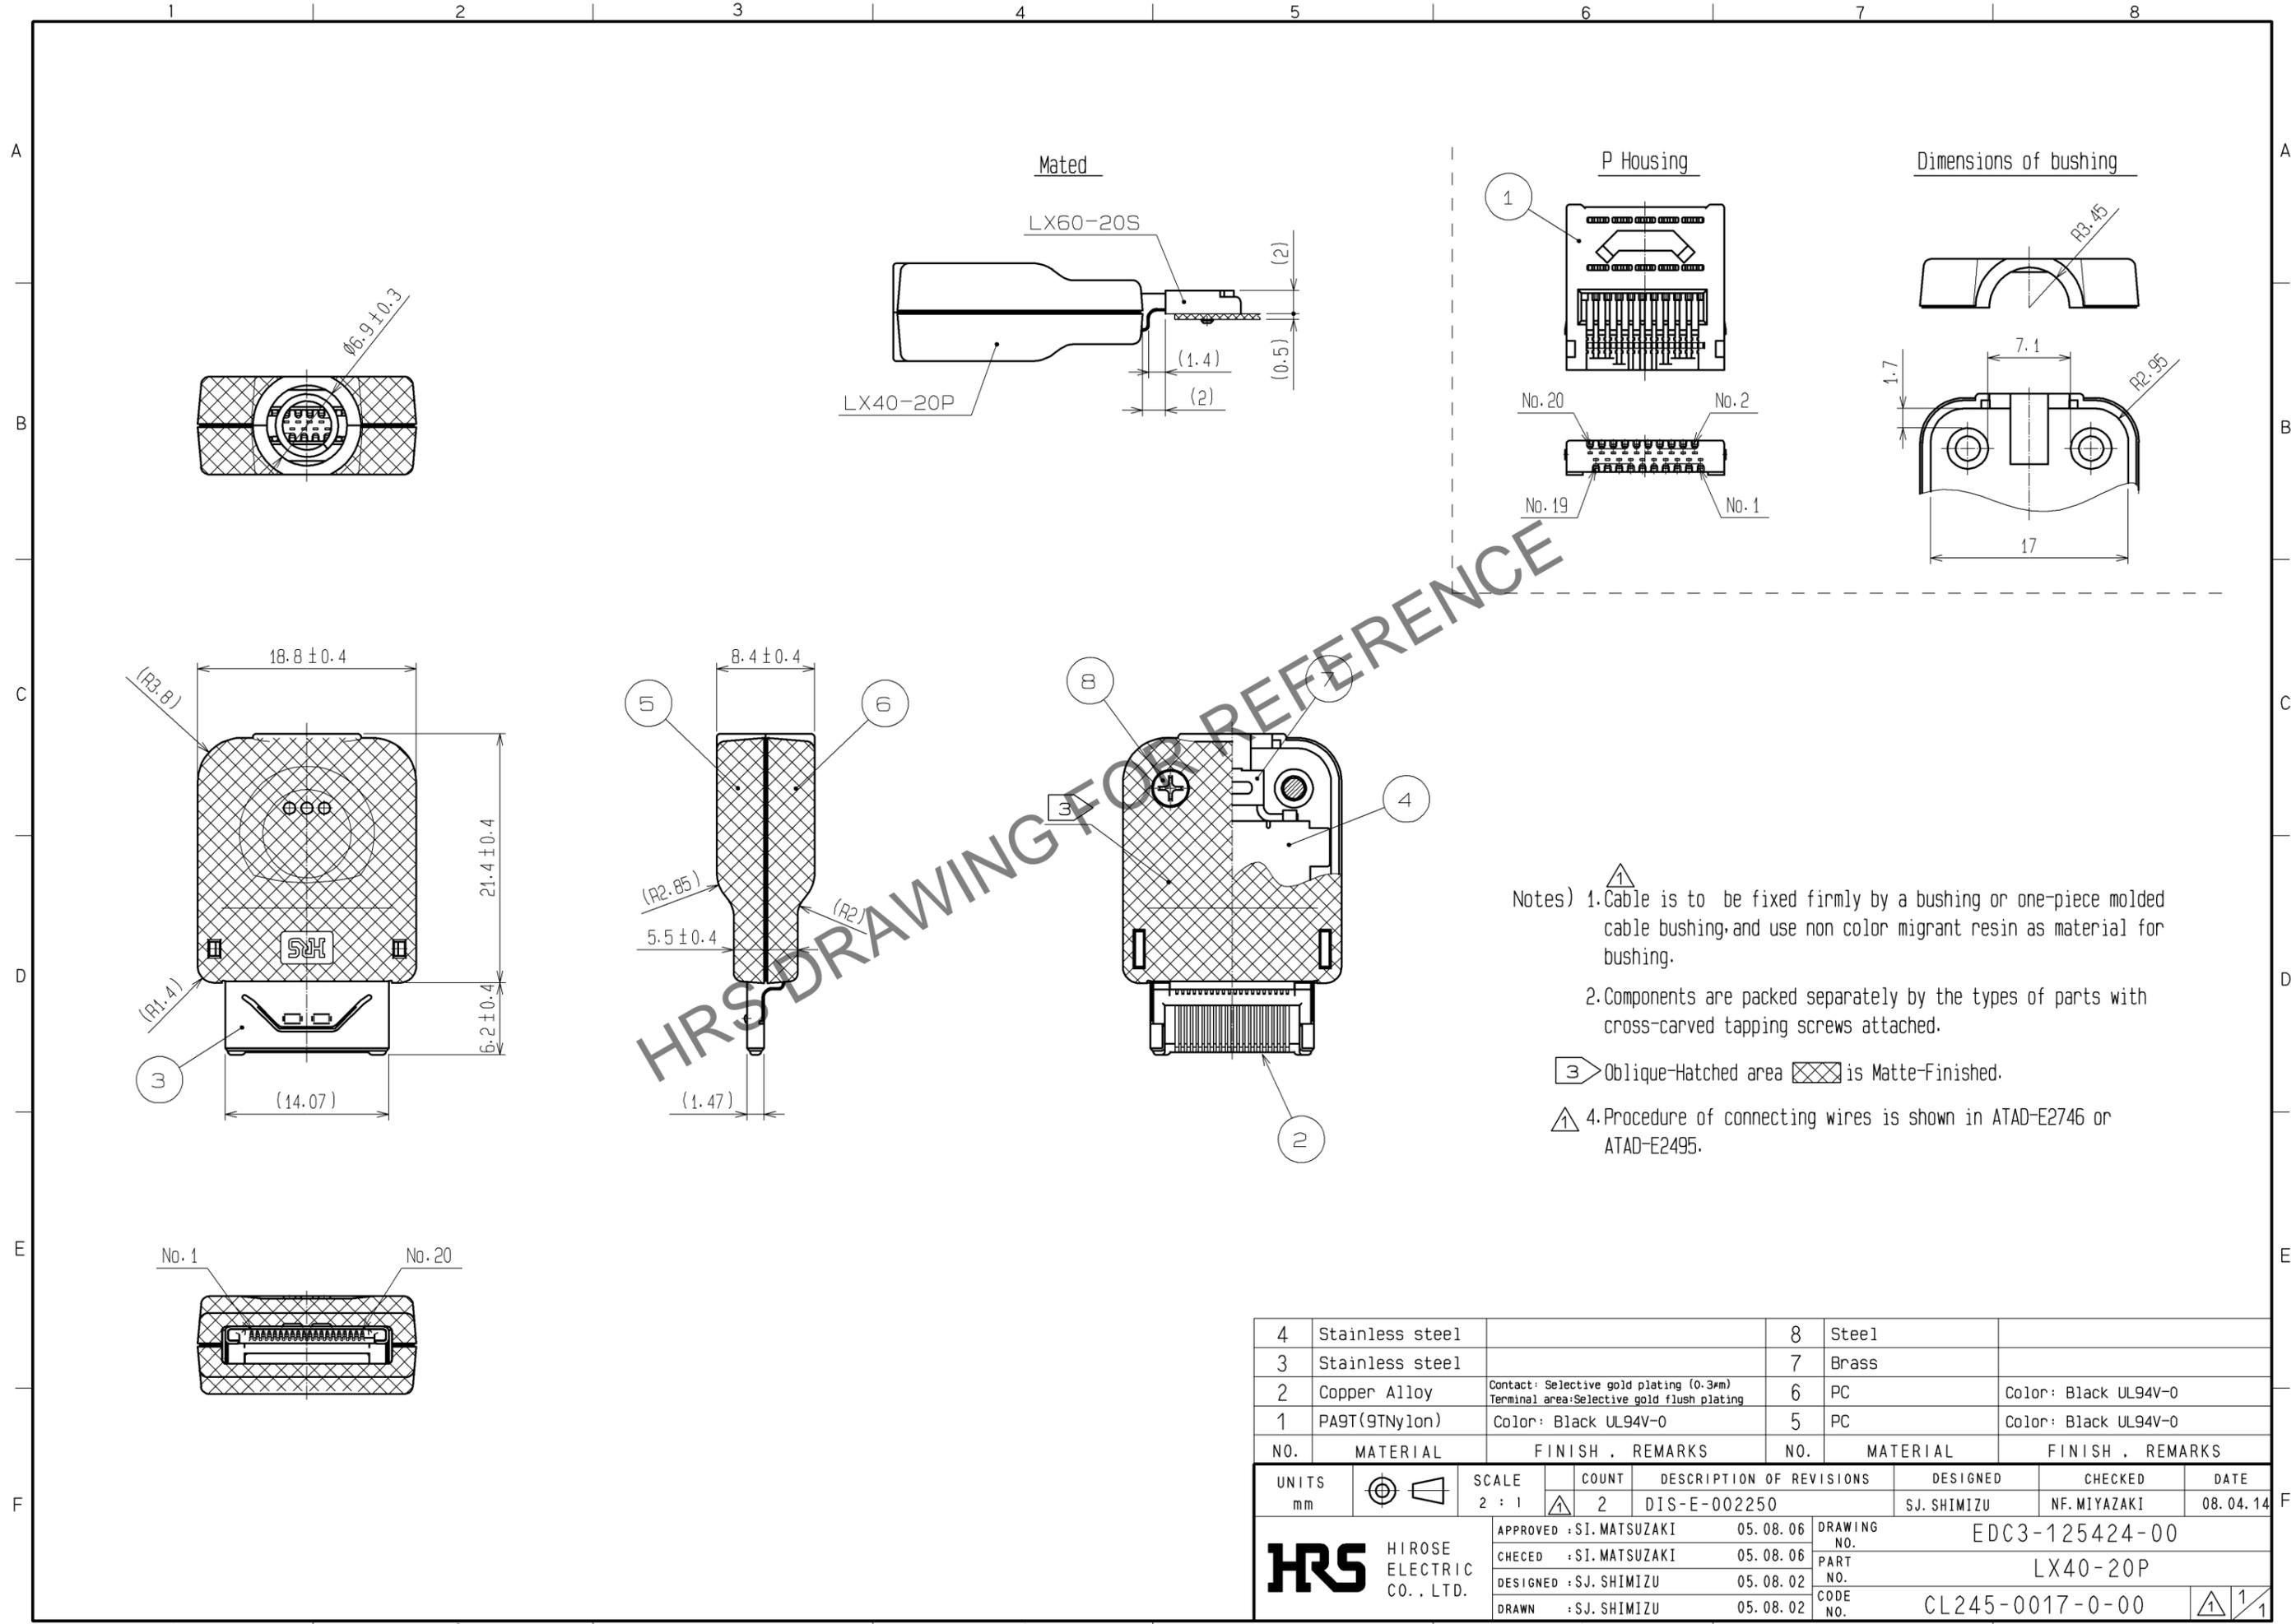

Notes) 1. Cable is to be fixed firmly by a bushing or one-piece molded cable bushing, and use non color migrant resin as material for bushing.
2. Components are packed separately by the types of parts with cross-carved tapping screws attached.
3. Oblique-Hatched area is Matte-Finished.
4. Procedure of connecting wires is shown in ATAD-E2746 or ATAD-E2495.

4	Stainless steel		8	Steel	
3	Stainless steel		7	Brass	
2	Copper Alloy	Contact: Selective gold plating (0.3μm) Terminal area: Selective gold flush plating	6	PC	Color: Black UL94V-0
1	PA9T(9TNylon)	Color: Black UL94V-0	5	PC	Color: Black UL94V-0
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-E-002250	DESIGNED S.J. SHIMIZU
HIROSE ELECTRIC CO., LTD.		APPROVED : SI. MATSUZAKI	05.08.06	DRAWING NO. EDC3-125424-00	
		CHECED : SI. MATSUZAKI	05.08.06	PART NO. LX40-20P	
		DESIGNED : S.J. SHIMIZU	05.08.02	CODE NO. CL245-0017-0-00	
		DRAWN : S.J. SHIMIZU	05.08.02	1	
		DATE 08.04.14	CHECKED NF. MIYAZAKI		