


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

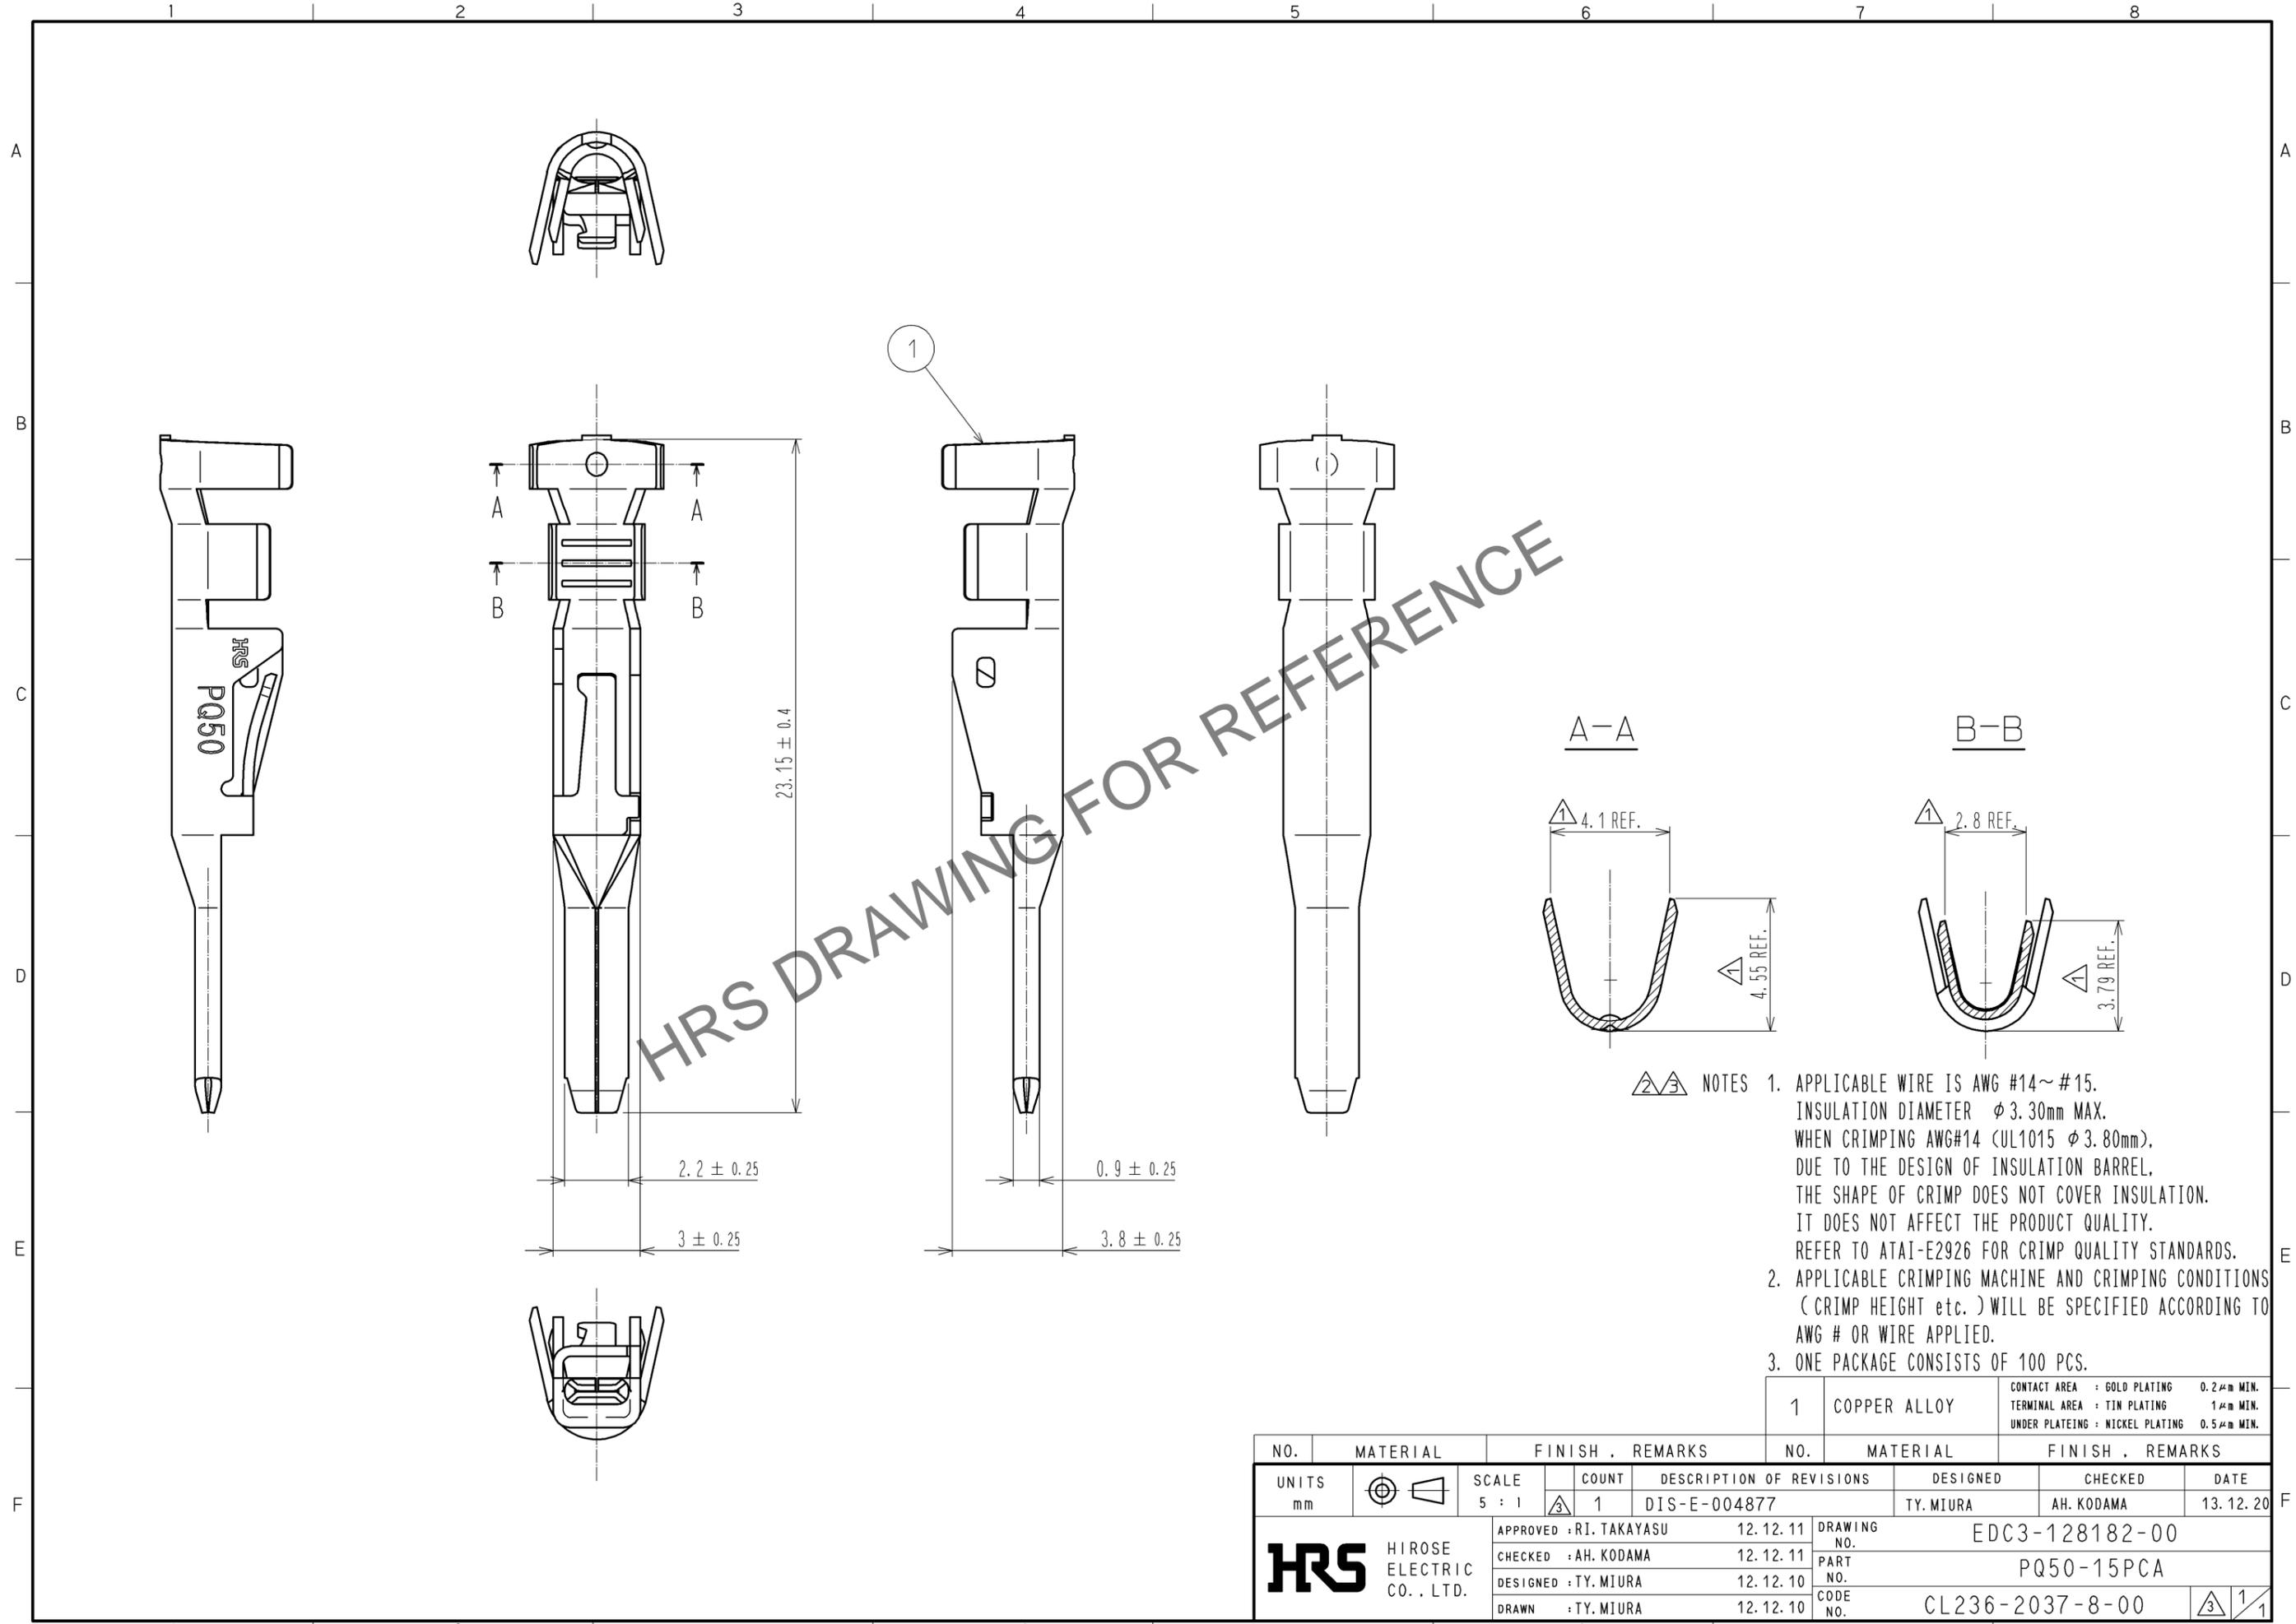

HRS DRAWING FOR REFERENCE

- NOTES**
1. APPLICABLE WIRE IS AWG #14~#15.
 INSULATION DIAMETER ϕ 3.30mm MAX.
 WHEN CRIMPING AWG#14 (UL1015 ϕ 3.80mm).
 DUE TO THE DESIGN OF INSULATION BARREL,
 THE SHAPE OF CRIMP DOES NOT COVER INSULATION.
 IT DOES NOT AFFECT THE PRODUCT QUALITY.
 REFER TO ATAI-E2926 FOR CRIMP QUALITY STANDARDS.
 2. APPLICABLE CRIMPING MACHINE AND CRIMPING CONDITIONS
 (CRIMP HEIGHT etc.) WILL BE SPECIFIED ACCORDING TO
 AWG # OR WIRE APPLIED.
 3. ONE PACKAGE CONSISTS OF 100 PCS.

1	COPPER ALLOY	CONTACT AREA : GOLD PLATING 0.2 μ m MIN. TERMINAL AREA : TIN PLATING 1 μ m MIN. UNDER PLATING : NICKEL PLATING 0.5 μ m MIN.
---	--------------	---

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS	
				DESIGNED TY. MIURA	CHECKED AH. KODAMA
				DATE 13.12.20	
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU 12.12.11	DRAWING NO. EDC3-128182-00		
		CHECKED : AH. KODAMA 12.12.11	PART NO. PQ50-15PCA		
		DESIGNED : TY. MIURA 12.12.10	CODE NO. CL236-2037-8-00		
		DRAWN : TY. MIURA 12.12.10			1/1